
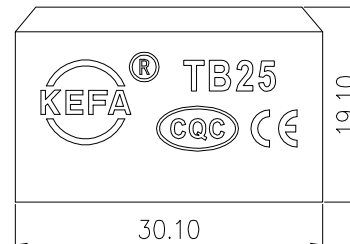


linear dimension(Tolerances Standard GB/T 14486-2008)								— ▯ ⊥			
variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	to	over 10	over 100	
		to 6	to 10	to 30	to 60	to 100	to 160		to 10	to 100	
tolerance		±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.12.15

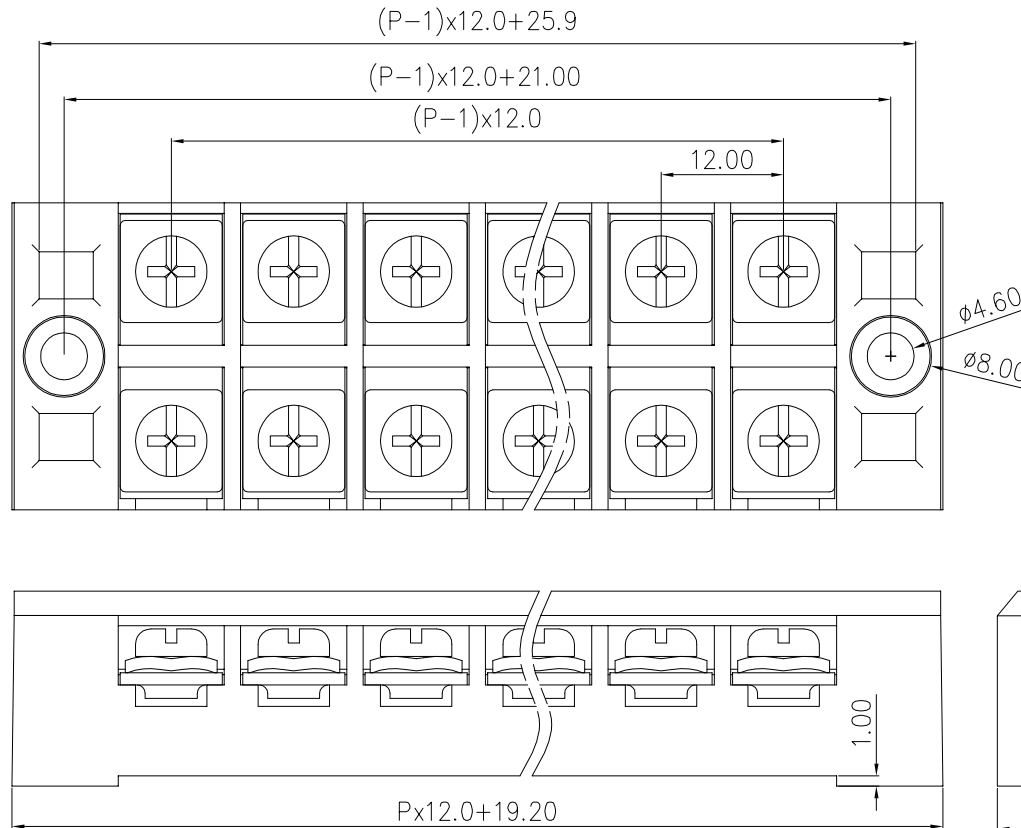

UL/CUL 技术参数 UL/CUL Technical Data				
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	-
额定电流 Rated Current [A]		25	-	-
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]				
IEC 技术参数 IEC Technical Data				
额定电压 Rated Voltage [V]		750		
额定电流 Rated Current [A]		32		
耐电压 Withstanding Voltage		3000V/1Min		
导线截面积 Conductor cross section		4.0		
硬质/柔性导线 Solid/flexible [mm ²]				
材料 Material				
绝缘材料 Insulation Material		PBT		
阻燃等级 Inflammability		UL94V-2		
导体材料 Contactor Material		铁合金 ferroalloy/铜合金 Copper alloy		
导体表面镀层 Contactive Coating		镀镍 Ni plated		
一般参数 Other Data				
间距 Pitch [mm]		12.0		
极数 Poles [P]		2-12		
剥线长度 Stripping Length [mm]		-		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/0.9		
工作温度 Operating temperatur [°C]		-30~+120		
引针尺寸 Pin Dimensions [mm]		-		
PCB板孔径 PCB Hole Diameter [mm]		-		

DES.	LQQ	DATE	21.12.15	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	BY	DATE	21.12.15	 慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD				名称 / TITLE	 TB25-12.0			
APP.	CLF	DATE	21.12.15									