


linear dimension(Tolerances Standard GB/T 14486-2008)								—	∇	\perp
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.12.15

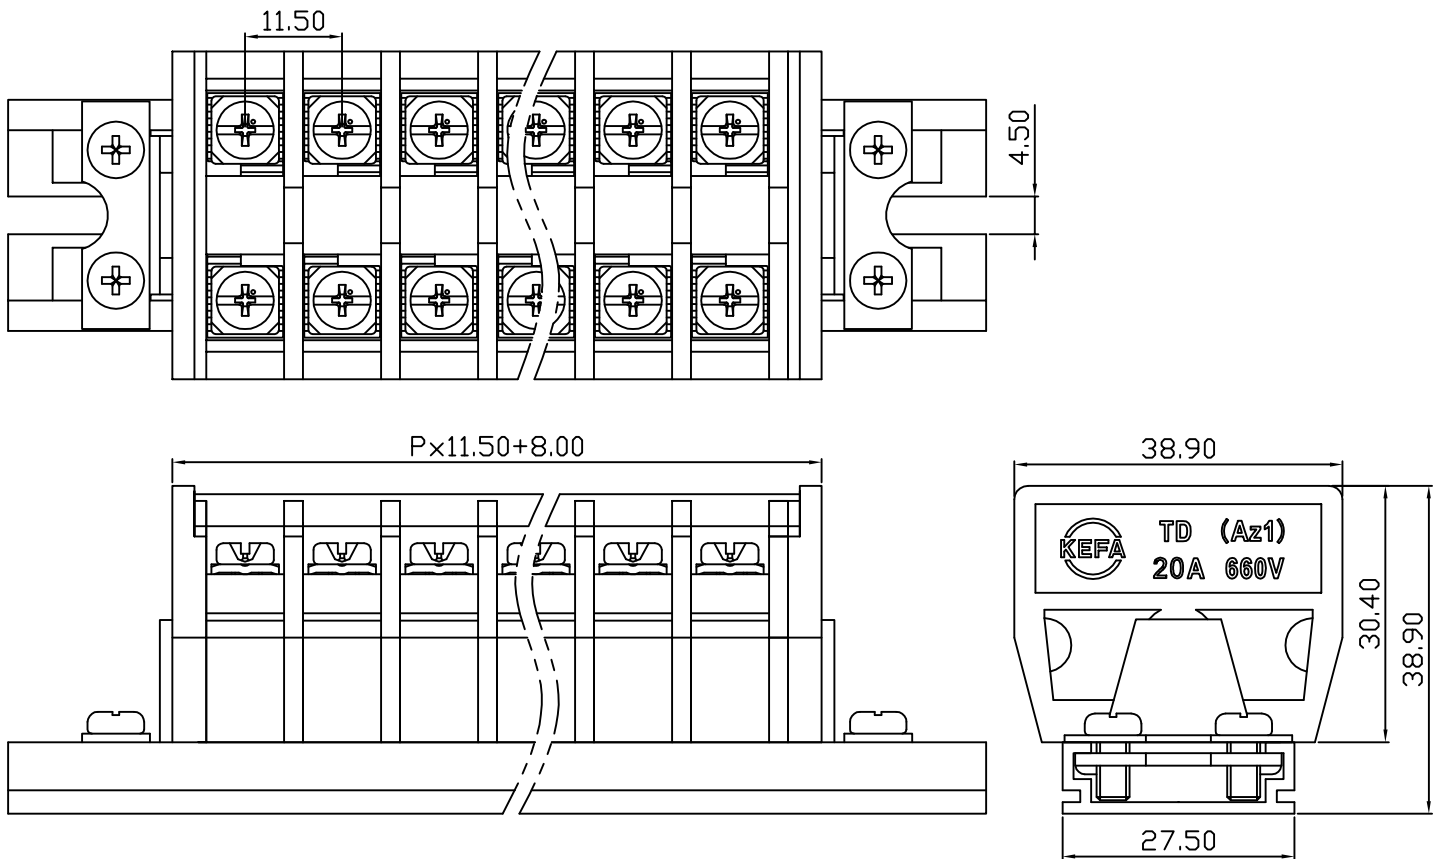

UL/CUL 技术参数		UL/CUL Technical Data			UL logo
等级	Use Group	B	C	D	
额定电压	Rated Voltage [V]	300	-	-	IEC logo
额定电流	Rated Current [A]	20	-	-	
接线范围	Wire Range	22-12			
单/多芯线	Solid/Stranded [AWG]				
IEC 技术参数		IEC Technical Data			IEC logo
额定电压	Rated Voltage [V]	660			
额定电流	Rated Current [A]	30			
耐电压	Withstanding Voltage	3000V/1Min			
导线截面积	Conductor cross section	4.0			
硬质/柔性导线	Solid/flexible [mm ²]				
材料		Material			
绝缘材料	Insulation Material	PA66			
阻燃等级	Inflammability	UL94V-0			
导体材料	Contacting Material	铁合金 ferroalloy/铜合金 Copper alloy			
导体表面镀层	Contactive Coating	镀镍 Ni Plated			
一般参数		Other Data			
间距	Pitch [mm]	11.5			
极数	Poles [P]	01-XX			
剥线长度	Stripping Length [mm]	-			
螺丝	Screw/扭矩 Torque(Max) [N.m]	M4/1.0			
工作温度	Operating temperatur [°C]	-40~+105			
引针尺寸	Pin Dimensions [mm]	-			
PCB板孔径	PCB Hole Diameter [mm]	-			

DES.	LQQ	DATE	21.12.15	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	BY	DATE	21.12.15	 慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD					名称 / TITLE TD20-11.5			
APP.	CLF	DATE	21.12.15									